ZUOYEAL

TECHNICAL DATA SHEET

SINGLE-MODE OPTICAL FIBRE CABLE SERIES


12-288C

ARMORED CABLE

MODEL **GYFTA**

One stranded loose-tube design from 12 to 288 fibres: PBT tubes around a central FRP strength member, aluminium tape and a black PE sheath. G.652D fibre.

FIBRE COUNT	LOOSE TUBES
12-288	**2-24**
ARMOUR	JACKET
AL TAPE	**PE**

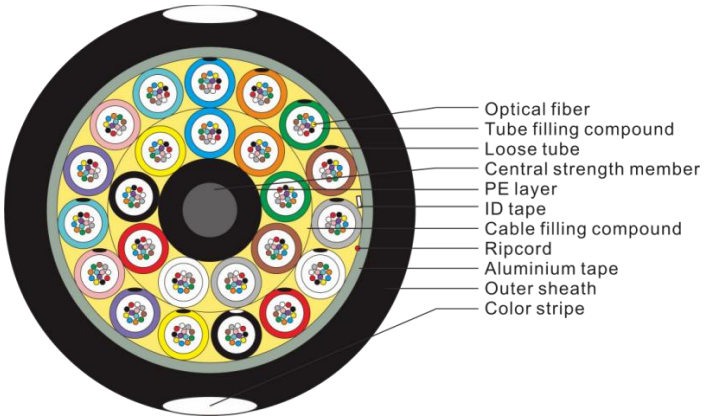

01 OVERVIEW

Product overview

The GYFTA is a single-mode optical fibre cable for aerial and duct installation, built on one stranded loose-tube core from 12 to 288 fibres. Two to twenty-four PBT loose tubes are stranded around a central FRP strength member; the core is wrapped in aluminium tape and a black PE sheath.

Tubes and the cable core are filled with water-blocking compound, two white stripes run along the sheath, and every count is supplied on 4,000 m drums. Dimensions and weights change with the fibre count — see the series table on page 3.

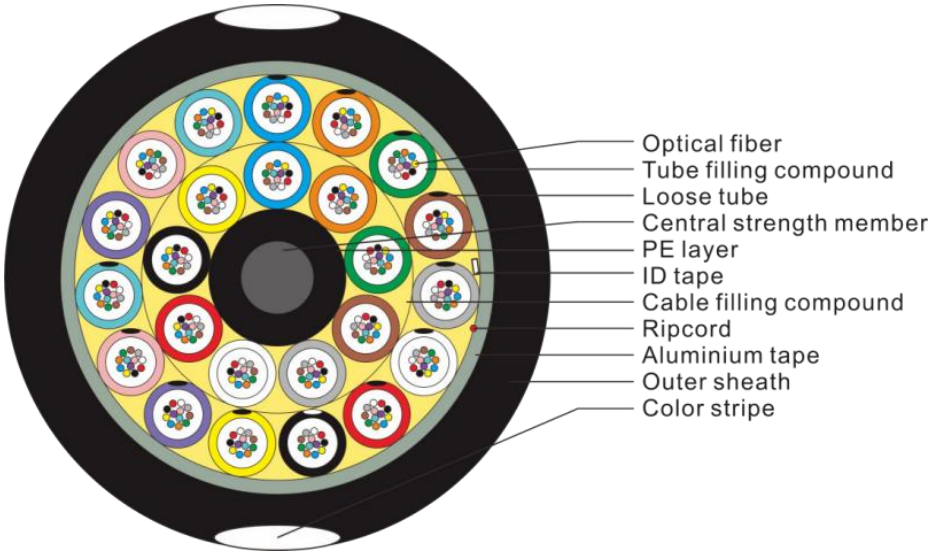


FIG. 1 Cable cross-section (not to scale)

KEY FEATURES

- Eight stock counts from 12 to 288 fibres on one design
- G.652D fibre: ≤ 0.35 dB/km at 1310 nm and ≤ 0.21 dB/km at 1550 nm
- Moisture barrier: jelly-filled tubes, filling compound and aluminium tape
- 112-316 kg/km, operating range −40 °C to +60 °C

APPLICATIONS

AERIAL	DUCT	BACKBONE	FTTH
Self-supporting spans	In-duct	Metro trunk	Access networks

AT A GLANCE

ITEM	VALUE	ITEM	VALUE
Fibre counts	12 · 24 · 48 · 72 · 96 · 144 · 216 · 288	Cable diameter	11.8 - 19.5 mm
Cable weight	112 - 316 kg/km	Operating range	−40 to +60 °C

02 STANDARDS

Reference standards

STANDARD	SCOPE
IEC 60794-1-1	Optical fibre cables — generic specification
IEC 60794-1-2	Optical fibre cables — basic optical cable test procedures
IEC 60794-3	Optical fibre cables — sectional specification: outdoor cables

03 CONSTRUCTION

Construction & dimensions

FIBRE COUNT	12	24	48	72	96	144	216	288
Loose tubes	2	4	8	6	8	12	6+12	9+15
Tube diameter (mm)	2.2	2.2	2.0	2.4	2.4	2.4	2.4	2.4
Tube wall (mm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3
Max. fibres per tube	6	6	6	12	12	12	12	12
Fillers	4	2	0	0	0	0	0	0
CSM diameter (mm)	2.4	2.4	2.4	2.6	2.6	2.6	2.6	2.6
CSM PE layer OD (mm)	–	–	3.5	–	4.2	7.3	–	4.9
Cable diameter (mm)	11.8	11.8	12.5	12.4	14.0	17.1	17.2	19.5
Cable weight (kg/km)	113	112	127	127	161	239	244	316

Common to all counts: PBT loose tube, wall 0.3 ± 0.05 mm, filled with thixotropic compound; PP filler rods where a slot is empty; FRP central strength member with PE layer; cable filling compound; one ripcord; aluminium tape; black PE sheath, nominal 2.0 mm (minimum 1.8 mm), two white stripes.

04 IDENTIFICATION

Fibre & tube identification

1	2	3	4	5	6	7	8	9	10	11	12
Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Violet	Pink	Aqua

Fibre colour code — fibres are counted 1 to 12 in each tube using the colours above.

LOOSE TUBE (LT) & FILLER ROD (FR) COLOUR CODE

FIBRE COUNT	ELEMENT NO.											
	1	2	3	4	5	6	7	8	9	10	11	12
12	LT	LT	FR	FR	FR	FR						
24	LT	LT	LT	LT	FR	FR						
72	LT	LT	LT	LT	LT	LT						
48/96	LT	LT	LT	LT	LT	LT	LT	LT				
144	LT	LT	LT	LT	LT	LT	LT	LT	LT	LT	LT	LT
288	LT	LT	LT	LT	LT	LT	LT	LT	LT			
	LT+BS	LT+BS	LT+BS	LT+BS	LT+BS	LT+BS	LT+BS	LT+YS	LT+BS	LT+BS	LT+BS	LT+BS
	LT	LT	LT									

LT = loose tube, FR = filler rod, BS = black stripe, YS = yellow stripe. Element 1 starts blue, element 2 orange, and so on with the colour code above.

HOW TO SPECIFY

MODEL	GYFTA-<fibres>C — for example GYFTA-144C
FIBRE COUNT	12 · 24 · 48 · 72 · 96 · 144 · 216 · 288
DRUM	4,000 m per drum (±2%); other lengths on request

05 OPTICAL

Optical performance

ITEM	SPECIFICATION
Fibre type	Single-mode, ITU-T G.652D
Fibre material	Doped silica
Attenuation @ 1310 nm	≤ 0.35 dB/km
Attenuation @ 1550 nm	≤ 0.21 dB/km
Cable cut-off wavelength	≤ 1260 nm
Zero-dispersion wavelength	1300 - 1324 nm
Zero-dispersion slope	≤ 0.093 ps/(nm²·km)
Chromatic dispersion @ 1288-1339 nm	≤ 3.5 ps/(nm·km)
Chromatic dispersion @ 1271-1360 nm	≤ 5.3 ps/(nm·km)
Chromatic dispersion @ 1550 nm	≤ 18 ps/(nm·km)
Chromatic dispersion @ 1625 nm	≤ 22 ps/(nm·km)
PMD	≤ 0.2 ps/√km
Mode field diameter @ 1310 nm	9.2 ± 0.4 μm
Core / cladding concentricity error	≤ 0.6 μm
Cladding diameter	125.0 ± 0.7 μm
Cladding non-circularity	≤ 1.0 %
Primary coating diameter	245 ± 10 μm

06 PERFORMANCE

Cable performance

ITEM	SPECIFICATION
Bending radius	10 × cable diameter (static) · 20 × cable diameter (dynamic)
Operating temperature	−40 °C to +60 °C
Storage / transport temperature	−40 °C to +70 °C
Installation temperature	−20 °C to +60 °C

07 TESTING

Mechanical & environmental tests

S/N	ITEM	TEST METHOD	ACCEPTANCE
1	Tensile strength IEC 60794-1-2-E1	2,000 N for 12/24/72/96C · 1,800 N for 48/144/216/288C 50 m · 1 min	Δ loss ≤ 0.1 dB @1550 nm Fibre strain ≤ 0.33 %
2	Crush IEC 60794-1-2-E3	1,000 N/100 mm · 1 min	Δ loss ≤ 0.1 dB @1550 nm No fibre break
3	Impact IEC 60794-1-2-E4	10 points · 2 impacts each · 450 g × 1 m	Δ loss ≤ 0.1 dB @1550 nm No fibre break
4	Repeated bending IEC 60794-1-2-E6	20 × cable diameter · 3 s/cycle · 30 cycles	Δ loss ≤ 0.1 dB @1550 nm No fibre break
5	Torsion IEC 60794-1-2-E7	1 m · ±180° · 10 cycles	Δ loss ≤ 0.1 dB @1550 nm No fibre break
6	Water penetration IEC 60794-1-2-F5B	1 m head · 3 m sample · 24 h	No water at the opposite end
7	Temperature cycling IEC 60794-1-2-F1	+20 → −40 → +70 → +20 °C 12 h per step · 2 cycles	Δ loss ≤ 0.1 dB/km @1550 nm No fibre break
8	Compound flow IEC 60794-1-2-E14	30 cm sample · 70 ± 2 °C · 24 h	No compound flow

08 PACKING

Packing & drum

DRUM	Each single length is wound on an iron stand-wooden composite or pure wooden drum.
STANDARD LENGTH	2,000 / 3,000 / 4,000 m per drum, ±2%.
PROTECTION	Covered by a plastic buffer sheet and sealed with strong wooden battens.
TEST ALLOWANCE	At least 3 m of the cable inner end is reserved for testing.

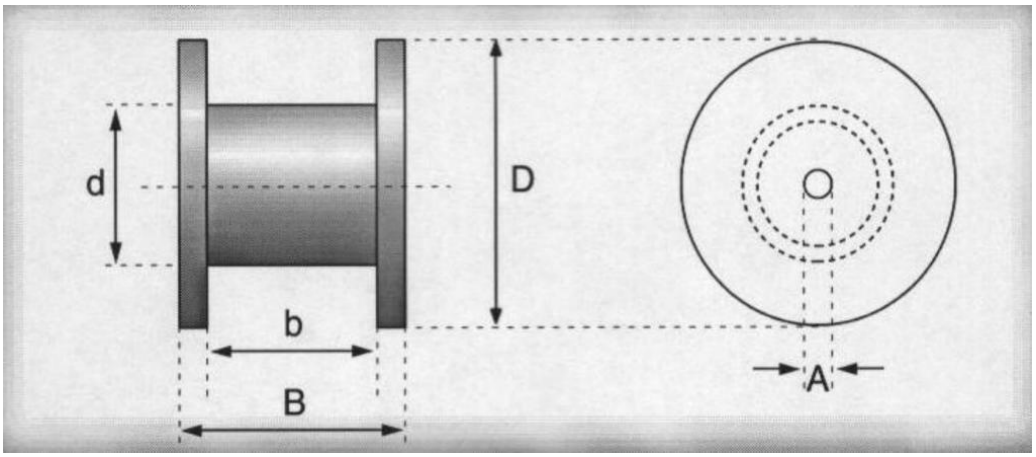


FIG. 2 Drum dimensions — D contains the seal dimension

CABLE TYPE	DRUM LENGTH (m)	D (mm)	d (mm)	B (mm)	b (mm)
GYFTA 12/24C	4,000	1,286	500	710	660
GYFTA 48/72C	4,000	1,288	580	1,100	1,000
GYFTA 96C	4,000	1,438	700	1,100	1,000
GYFTA 144/216C	4,000	1,638	700	1,100	970
GYFTA 288C	4,000	1,838	900	1,100	970

Other fibre counts and drum lengths on request.

ZUOYEAL

ZUOYEAL TECHNOLOGY

Connecting More, With Fiber

This datasheet describes the GYFTA aerial / duct cable series at the time of publication. Dimensions, weights and configurations may change without notice; confirm current values with ZUOYEAL before ordering.

12–288 F · G.652D · AERIAL / DUCT

Connecting More, With Fiber